WEAVER SCOPES®

AGAIN IN 1967 . . .
THE WORLD'S MOST USED,
MOST PROVED SCOPES

K1
1-POWER

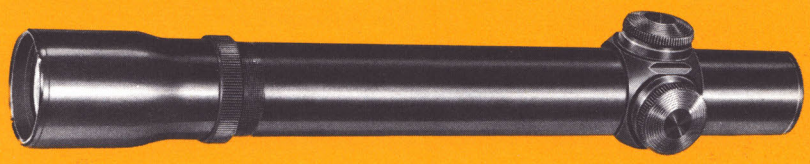

K2.5
2 1/2-POWER
K3
3-POWER

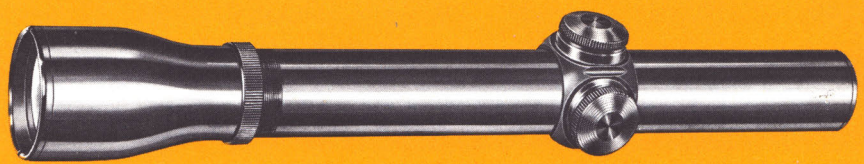

K4
4-POWER

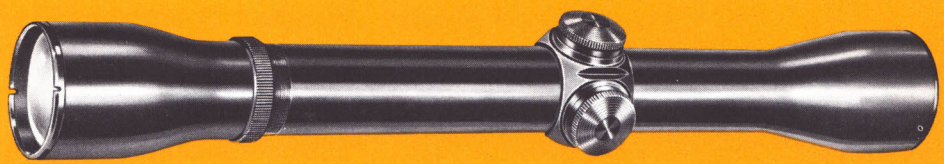

K6
6-POWER

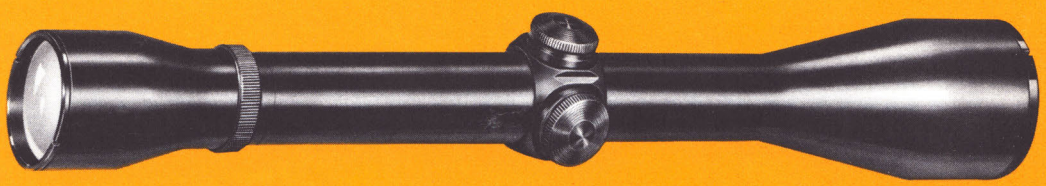

K8
8-POWER
K10
10-POWER

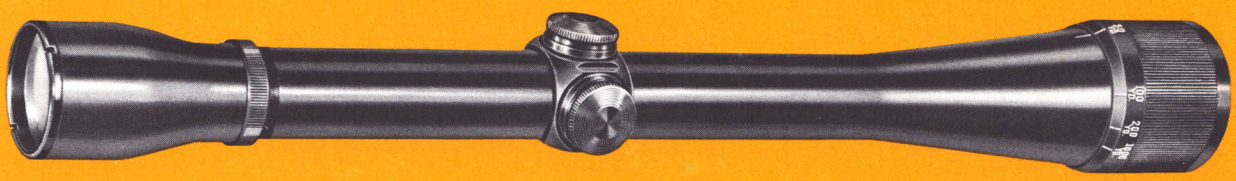

K12
12-POWER

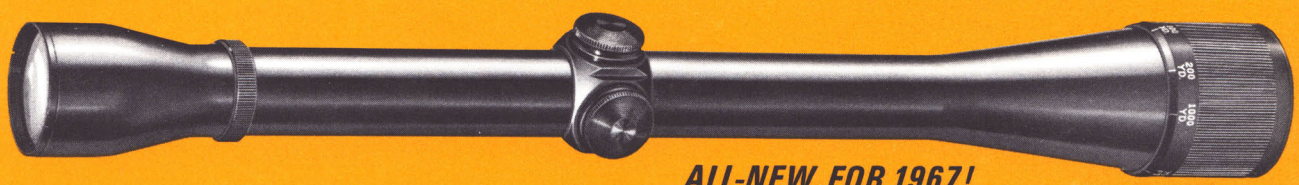

ALL-NEW FOR 1967!

K MODELS

First choice of experienced hunters, Weaver's K Models feature Weaver-Patented Fixed-Reticle, adjustments of guaranteed accuracy, compression O-ring sealing and nitrogen processing, lightweight construction, all steel tube for strength and dependability, fine finish in traditional gun-blue.

New high-power K Models—improved 8-power K8 and 10-power K10, and all-new 12-power K12—feature 40mm objective lens for image brightness and less critical eye-positioning, new one-piece Range Focus unit for instant objective lens focusing for any target range from 50 feet to 1000 yards.

V4.5
1 1/2x to 4 1/2x

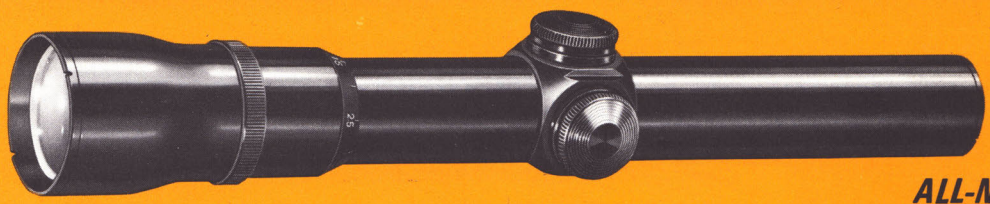

ALL-NEW FOR 1967!

V7
2 1/2x to 7x

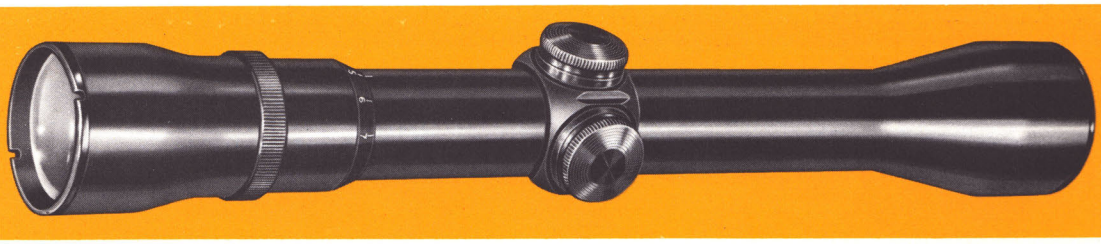

V9
3x to 9x

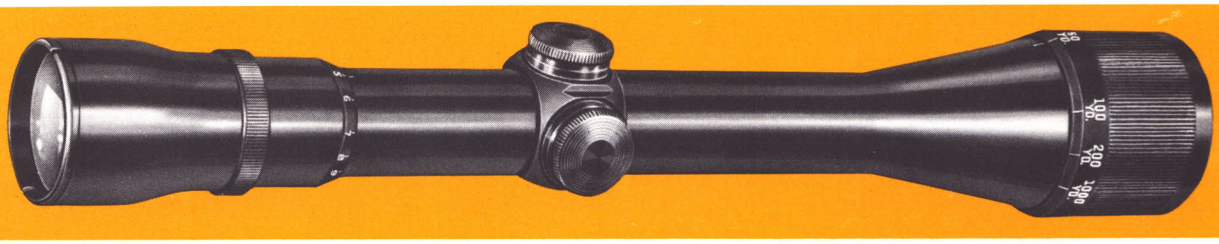

V MODELS

These three oustanding variable power Weaver-Scopes have been designed for the shooter who wants complete sighting versatility plus all the most advanced features found in any variables.

Optics are precision-ground, hard-coated. Focus is clear and sharp at every power setting—never blurred. Eye relief is long and safe at all magnifications. Eyepiece provides fast, easy power change. Centered, constant-size reticle assures speed and ease in aiming. Adjustments are weatherproof, always accurate, and guaranteed. Complete sealing permits rough weather hunting.

V9 also offers exclusive Weaver Range Focus, first ever available on a hunting-type variable. Allows instant focusing at any range from 75 ft. to 1000 yards, eliminates parallax and increases image sharpness.

V22
3x to 6x

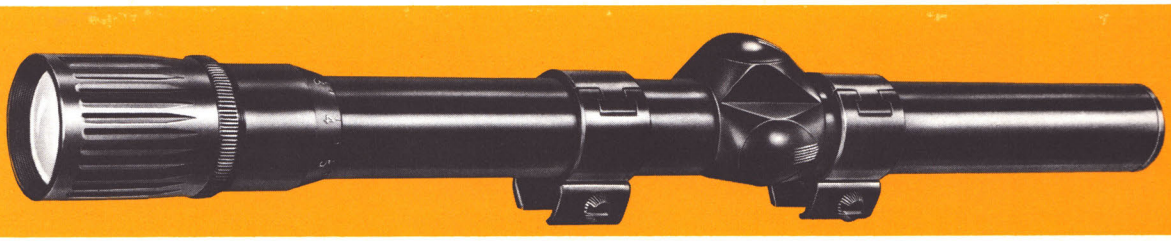

C4
4-POWER

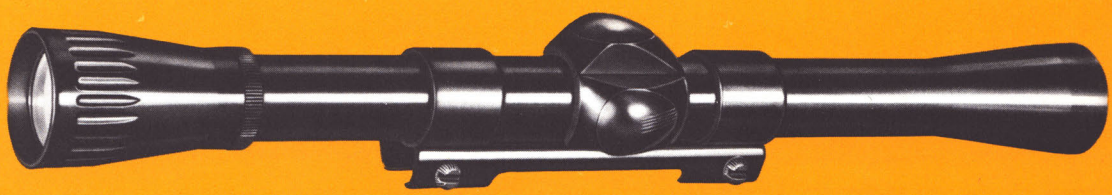

C6
6-POWER

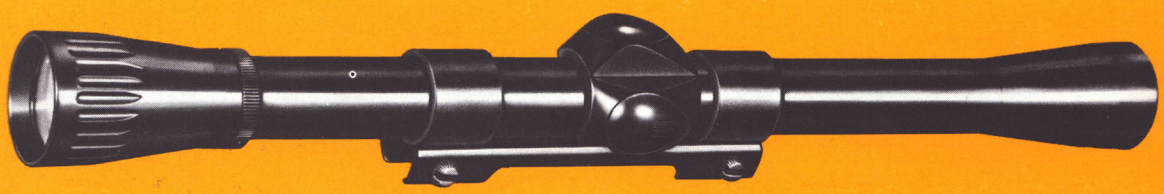

V22 and C MODELS ...for .22's

Now Weaver offers three fine scopes designed especially for .22's and other rifles of light recoil. Limited to use on light recoil rifles only because of short eye relief, they are sturdy, accurate, quality scopes. Factory-equipped with Tip-Off or N Mount. Tip-Off Mount *can be easily installed in seconds*, without tools, on any .22 with a factory-grooved receiver.

The continuously-variable V22 is ideal for shooters wanting one scope for all kinds of shooting, at sho to long ranges. The 7/8" scope tube provides larger lenses for better illumination. Crosshairs always centered and constant-size, regardless of power setting. Light, strong, compact C Models offer quality features usually found only in more costly scopes. Reticles are constantly-centered for fast, easy aiming. Lenses are larger for bright, sharp images.

A2.8
2 3/4-POWER

A4
4-POWER

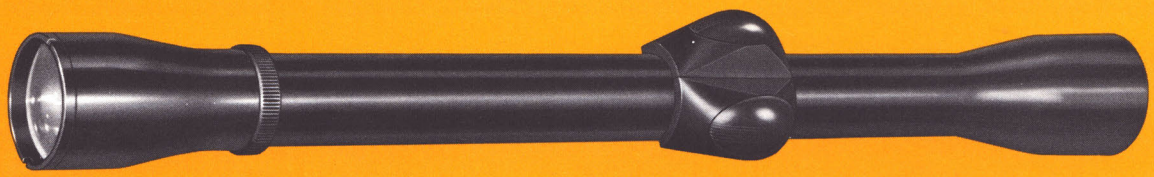

A MODELS

Weaver's compact A Models are real featherweights, weighing less than seven ounces each. Offering all the features shooters want most in a high-power scope, the A2.8 and A4 are fine choices for the marksman who wants big-bore scope performance at a moderate price.

A Model features include: precision, achromatic optical system; long eye relief for comfortable use on any rifle; constantly-centered reticle for fast, easy aiming; internal windage and elevation adjustments of guaranteed accuracy; strong steel tubes for dependable performance; positive sealing and nitrogen processing for all-weather shooting; American craftsmanship.

SPECIFICATIONS FOR ALL WEAVER-SCOPES

	POWER	FIELD OF VIEW (feet)	TUBE DIAMETER (inches)	EYEPIECE DIAMETER (inches)	FRONT END DIAMETER (inches)	EYE DISTANCE (inches)	LENGTH (inches)	WEIGHT (ounces)	TYPE OF ADJUSTMENTS	RETICLES* AVAILABLE
K1	1	96	1.000	1.235	1.000	3-6	9½	8	1″ click	1, 2, 4, 5
K2.5	2½	43	1.000	1.485	1.000	3-6	10⅜	8½	½″ click	1, 2, 3, 4
K3	3	37	1.000	1.485	1.000	3-6	10⅜	8½	½″ click	1, 2, 3, 4
K4	4	31	1.000	1.485	1.550	3-5½	11¼	9½	¼″ click	1, 2, 3, 4
K6	6	20	1.000	1.485	1.860	3-5	13⅝	11	¼″ click	1, 2, 3, 4
K8	8	15	1.000	1.485	1.860	3-5	14⅝	12¼	¼″ click	1, 3, 4
K10	10	12	1.000	1.485	1.860	3-5	15½	12½	¼″ click	1, 3, 4
K12	12	10	1.000	1.485	1.860	3-5	15¾	12½	¼″ click	1, 3, 4
V4.5	1½-4½	61-21	1.000	1.485	1.000	3-5	10	8½	¼″ click	1, 2; 4
V7	2½-7	40-15	1.000	1.485	1.550	3-5	11⅝	10½	¼″ click	1, 2, 4
V9	3-9	33-12	1.000	1.485	1.860	3-5	13	13	¼″ click	1, 2, 4
V22	3-6	30-16	.875	1.185	.875	2	12½	6½	friction lock	1 only
A2.8	2¾	31	.750	1.100	.750	3-5	10½	6	friction lock	1, 2, 4
A4	4	20	.750	1.100	1.185	3-5	11½	6½	friction lock	1, 2, 4
C4	4	28	.750	1.184	1.100	2	11⅞	7	friction lock	1 only
C6	6	18	.750	1.184	1.100	2	12⅜	8	friction lock	1 only

FOCUS—Eyepiece of all scopes adjusts to user's vision.

***RETICLES** (as illustrated below) — 1. Crosshair; 2. Post and Crosshair; 3. Range-Finder; 4. Rifle Dot; 5. Large Shotgun Dot for K1 Scope when used on shotgun. 1, 2, and 5 reticles available as indicated at no extra cost. Reticles 3 and 4 available as indicated at extra cost.

*WEAVER-SCOPE RETICLES

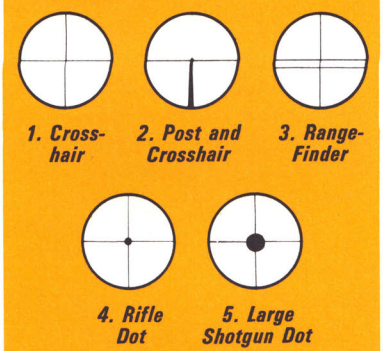

1. Crosshair
2. Post and Crosshair
3. Range-Finder
4. Rifle Dot
5. Large Shotgun Dot

WEAVER LENS CAPS

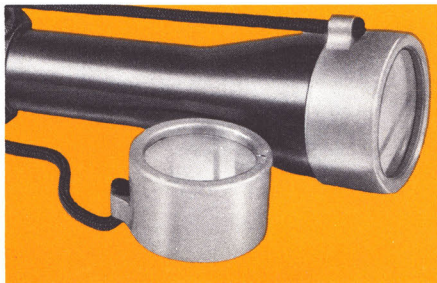

Made with transparent windows that allow the scope to be used with the caps in position in emergency. Durable and snug fitting. Made to fit all K, V, A, C, and V22 Model Weaver-Scopes.

WEAVER MOUNTS®

AGAIN IN 1967 . . . THE MOST COMPLETE LINE OF QUALITY MOUNTS

Made for 3/4", 1", and 1.023" (26mm) scopes

Scope quickly pivots to side for use of iron sights

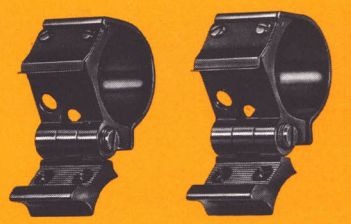

PIVOT MOUNT OPEN

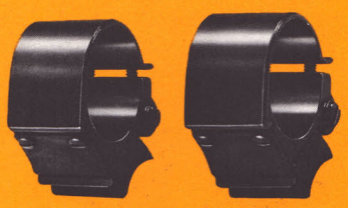

PIVOT MOUNT CLOSED

WEAVER PIVOT MOUNTS

The Weaver-Pivot Mount permits instant choice of scope or iron sights. Top mounting gives wide spacing of mount rings, rigidity, low scope position, easy installation. Scope can be quickly taken off rifle. Replacement is always accurate, alignment exact and fully dependable.

Hi-Style Weaver-Pivot Mounts are offered in 1" diameter only. The high rings position the scope 1/4" higher than the standard 1" ring, and are designed to provide adequate barrel and iron sight clearance for all scopes having objective end diameters greater than 1 3/4", such as the Model K6.

MADE FOR THESE RIFLES:	Rear Base	Front Base
ANSCHUTZ 153 Deluxe	119	119
BROWNING High-Power except 243, 308, 22-250, 222 and 222 Magnum	145	146
CIL 900	119	119
CIL 950	161	146
COOEY 71	147	146
ENFIELD with reshaped receiver.†		
Receiver shaped like Winchester 70	147	146
Receiver shaped like Remington 721	136	135
F. N. (Includes former HUSQVARNA), MAUSER with receiver about 1.410" diameter*	145	146
H & R Ultra Bolt Action	145	146
HVA, Lightweight HUSQVARNA, MAUSER with receiver about 1.300" diameter*	155	146
JAPANESE 6.5mm*†, 7.7mm*†	170	
MARLIN 36, 62, 336, 444	163	
MOSSBERG 800	155	155
REMINGTON 721; also 725 in 270, 280, 30-06, 375 and 700 in 270, 280, 30-06, 7mm Mag., 300 Win. Mag., 264, 375, 458	136	135
REMINGTON 722; 725 in 222, 244, 243; 700 in 222, 22-250, 243, 6mm, 308	136	140
REMINGTON 600	170	
REMINGTON 740, 742, 760	162	

MADE FOR THESE RIFLES:	Rear Base	Front Base
RUGER 44 Magnum Deerstalker	147	168
SAKO Finnwolf	153	
SAVAGE 99	114	119
SAVAGE 110	161	146
SCHULTZ & LARSEN	154	146
SEARS 50, 51	145	146
SEARS 51L	155	146
SEARS 53	147	146
SPRINGFIELD '03*†	154	155
SPRINGFIELD '03-A3*†	159	145
WEATHERBY MARK V	136	120
Models with FN Mauser Actions	145	146
WINCHESTER 54*, early Model 70	148	146
WINCHESTER 70 postwar models:		
375 H&H, 300 H&H Magnum calibers prior to 1964	149	146
375 H & H Magnum 1964 Model	139	146
300 Winchester Magnum, All other calibers	147	146
670	147	146
WINCHESTER 88, 100, use 1-piece base	153	

(*) Requires altering of bolt handle for any scope.

(†) Enfield, Japanese, and Springfield: Pivot Mount usable only on sporterized guns with suitable front and middle sights.

WEAVER N MOUNTS

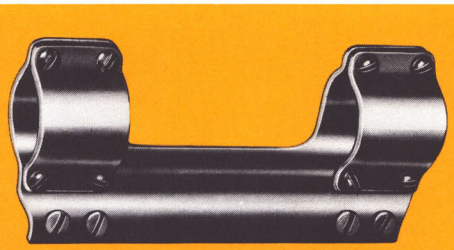

Type N Mounts (side bracket design) are pressed from tough alloy steel. They are rigid, sturdy, and suitable for use on high power rifles and .22's. Made in 3/4" diameter for A and C Models. The dependability of the inexpensive N Mount has been proved under all conditions and on large caliber rifles.





The 1" Tip-Off Mount for K Models consists of a pair of mount rings. Rings are split for easy installation.

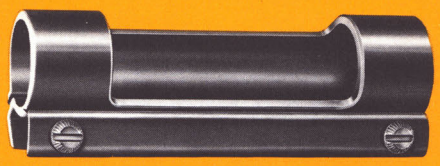

One-piece Tip-Off Mount for Models C and A Weaver-Scopes on .22 rifles having 3/8" dovetail receiver grooves.

WEAVER TIP-OFF MOUNTS

Tip-Off Mounts are made in ¾", ⅞" and 1" diameters for use on .22 rifles with ⅜" dovetail receiver grooves. The ¾" Tip-Off Mount is a one-piece mount for C Models and other ¾" scopes. The ⅞" and 1" Tip-Off Mounts consist of a pair of split rings for use on the ⅞" Model V22 and the 1" K Models, and other scopes with 1" tubes. Tip-Off Mounts require no bases; they clamp into receiver grooves of the rifle instantly, and clamping screws are tightened with a coin. No tools are needed.

RIFLES WITH 3/8" RECEIVER GROOVES:

Anschutz 141, 153
Browning .22 Automatic Grade I, T-Bolt Grades I and II
CIL 121, 180, 310
Colt "Colteer"
Cooey 64
H&R 422, 750, 755, 760, 800, 865
High Standard .22 Sport-King
Ithaca X5 Lightning
Kodiak 260
Lee-Enfield requires adapter TO-1 at extra cost; must be drilled, tapped
Marlin 39A, 56, 57, 80, 81, 88, 89, 98, 99, 101, 122, 980, 989
Mossberg 142, 144, 146, 151, 152, 300 Series, 400, 402, 620, 640
Noble 235, 257
Remington 10, 11, 12, 66, 76, 510, 511, 512, 513S, 550, 552, 572, 580, 581, 582
Ruger 10/22 with T9 base
Savage 4, 5, 6, 24, 29, 63, 65, 219
Stevens 34, 46, 73, 84, 85, 86, 87
Weatherby XXII
Winchester 61, 63, 69, 72, 74, 75S, 77, 121, 131, 135, 141, 145, 150, 190, 250, 255, 270, 275, 290

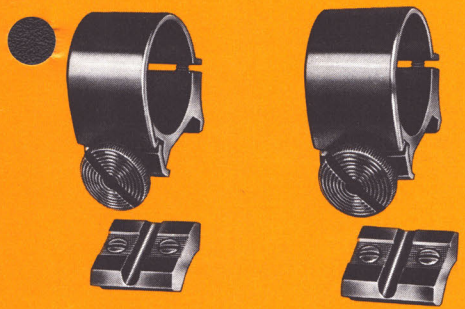

DETACHABLE TOP MOUNT

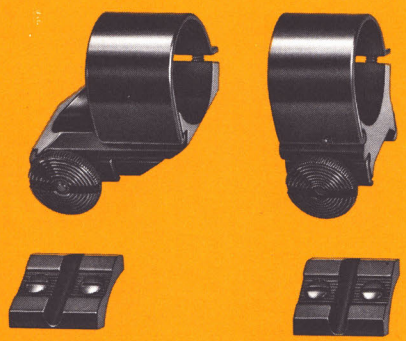

EXTENSION TOP MOUNT

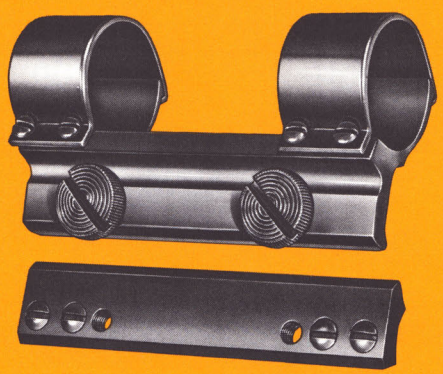

DETACHABLE SIDE MOUNT

WEAVER DETACHABLE MOUNTS

The performance of any scope can be no more accurate and dependable than the mount with which it is attached to the shooter's rifle. For more than twenty years, Weaver-Mounts have been the world's most used, most proved scope mounts. Light, compact, and finely finished, they can be used with complete assurance on rifles of heaviest recoil and under roughest hunting use. Installation is easy since most rifle receivers are factory drilled and tapped specifically for Weaver-Mounts.

Weaver-Detachable Top and Side Mounts are made with split rings in ¾", 1", and 1.023" (26mm) diameters; ⅞" diameter in top style only. The split-ring design permits the mount to be installed on the scope tube without removing any scope parts, breaking moisture seals, or affecting optical adjustments.

Hi-Style Detachable Top Mounts are available in 1" diameter only. The high rings position the scope ¼" higher than the standard 1" ring, and are designed to provide adequate barrel and iron sight clearance for scopes having large diameter objective ends, like the K6 and other scopes with objective diameters greater than 1¾".

Extension Rings for Detachable Top Mounts are made in 1" diameter for Model K and V scopes. The complete set consists of a regular high-style top mount ring plus an extension ring. With the extension ring used on the rifle's receiver bridge, the scope can be positioned ¾" further forward for improved eye relief. When used on the front receiver ring with longer scopes like the K8 or K12, the extension ring provides wider ring spacing, reduces scope overhang.

WEAVER DETACHABLE MOUNTS

Either Top or Side Mounts are suitable with Weaver-Scopes. Usually Detachable Top Mounts are preferred for longer scopes, particularly K6, K8, and K10. Top and Side Detachable Mount Bases and N Mounts for each gun are shown in the list.

Make, Model of Rifle	Bases for Detachable Mounts: Top Mount Rear	Top Mount Front	Side Mount	N Mounts: Scope Position Low	High
ANSCHUTZ 153 Deluxe (factory drilled)	19	19	..	....	....
BROWNING .22 Auto (base attaches to bbl. extending back over receiver)		60	..	....	....
243 and 308 (In discontinued special FN action)	55	64	1	N1	N4
243, 308, 22-250, 222 and 222 Magnum (All in Sako actions)	72	71	..	N1	N4
High-Power, other calibers	45	46	5	....	....
BSA HI-POWERED Rifles	28	28	..	....	....
CIL 830	....	....	1	N1	N4
900	19	19	..	....	....
950	61	46	1	N1	N4
COLT Coltsman in .223, .243, .308 calibers (round receivers)	25	25	..	....	....
Coltsman in .264, 30-06 calibers (round receivers)	54	54	..	....	....
Coltsman in .223 (Sako action)	67	66	..	....	....
Coltsman in other calibers (Sako action)	67	65	..	....	....
COOEY 60	....	....	2	N2	N3
71	47	46	..	....	....
ENFIELD receiver cut down like					
Remington 30	11	11	1	N1	N4
Winchester 70	47	46	..	....	....
Remington 721	36	11	..	....	....
H & R 65, 165, 150, 151 (Auto)	18	18	2	N2	N3
800	12	12	..	....	....
755, 765, 852	17	21	2	N2	N3
865	17	21	..	....	....
264, 265, 365, 250, 251, 450, 550	18	16	2	N2	N3
Topper 30, 22 Jet		60	..	....	....
Ultra Bolt Action	45	46	5	....	....
HIGH STANDARD Hi-Power	55	46	1	N1	N4
ITHACA X5 Lightning	39	39	..	....	....
JAPANESE 6.5mm.*, 7.7mm.*		70	1	N1	N4
KRAG (offset to left for easy ejection)	....	....	2	N2	N3
LEE-ENFIELD (Use TO-1 Adapter Base and 1" or ¾" Tip-Off Mount)	....	....	..	....	....
MARLIN 36, 62, 336, 444 (62, 336 drilled for 1-pc. Base #63)		63	..	N5	N5
455	45	46	5	....	....
57 Magnum		58	..	N5	N5
39A round barrel	29	16	2	N2	N3
39 octagon barrel (attach N Mount to side of barrel)	28	31	..	....	N5
A1, 50	15	15	2	N2	N3
88, 89, 98	18	18	2	N2	N3
80, 81, 980	12	21	2	N2	N3
F. N. (Includes former HUSQVARNA), MAUSER with receiver ring about 1.410" diameter*	45	46	5	....	....
HVA, Lightweight HUSQVARNA, MAUSER with receiver ring about 1.300" diameter*; ZB 8mm.*, 7mm.*, 6.5mm.* with round receiver	55	46	1	N1	N4
MOSSBERG 25, 26, 42, 46M, 140, 142, 146. Also late Models 45, 46 with ¾" diameter barrels	12	13	2	N2	N3
43, 44, 144, 46BT, 35. Also early Models 45, 46, 46A, 46B, with 13/16" diameter barrels	12	16	2	N2	N3
320, 340, 342, 346, 620, 640	21	21	2	N2	N3
40	16	21	2	N2	N3
350, 352, 50, 51, 151, 152	12	12	2	N2	N3
400	20A	42	..	....	....
800	55	55	..	....	....
REMINGTON 720	36	11	1	N1	N4
721; 725 in 280, 270, 30-06, 375 calibers; 700 in 270, 280, 30-06, 7mm. Magnum, 300 Winchester Magnum, 264, 375, 458	36	35	1	N1	N4
722, 40X; 725 in 222, 244, 243 calibers; 700 in 222, 222 Magnum, 22-250, 243, 6mm., 308	36	40A	1	N1	N4
740, 742, 760		62	..	....	....
30	11	11	1	N1	N4
14, 141	20A	27	..	N5	N5
12A, 121 with ¾" dia. bbls., 121 with 13/16" dia. bbl. (Detachable Side Mount not suitable for C Scopes on these rifles)	18	13	2	N5	N5
	18	17	2	N5	N5
12C octagon barrel	18	31	..	N5	N5
24 (#60 1-pc. base attaches to barrel and extends back over receiver)		60	..	N5	N5
241 (Use for K & A Scopes only)		60	..	N5	N5
25	18	21	2	N5	N5
10, 11, 12, 510, 511, 512, 521T, 34*, 341*	43	42	2	N2	N3
513S, 513T	43	44	2	N2	N3
514	16	21	2	N2	N3
550	12	12	2	N2	N3
552, 572	19	13	..	....	....
33*	17	13	2	N2	N3
41*	17	17	2	N2	N3
600		70	1	N1	N4
XP-100		70	..	....	....
RUGER 44 Magnum Deerstalker	47	68	..	....	....
10/22		T9	..	....	....

Make, Model of Rifle	Bases for Detachable Mounts: Top Mount Rear	Top Mount Front	Side Mount	N Mounts: Scope Position Low	High
SAKO Vixen, Forester, Finnbear, Finnwolf (Requires No Drilling)	67	66	..	....	....
	67	65	..	....	....
		53	..	....	....
SAVAGE 99	14	19	..	....	....
110	61	46	1	N1	N4
40, 45	11	11	2	N2	N3
20*	....	....	1	N1	N4
3 (For K and A Scopes)	16	21	2	N2	N3
3 (for C Scopes)	....	....	2	N2	N3
4, 5	12	13	2	N2	N3
6, 7	12	12	2	N2	N3
19, 23	15	16	2	N2	N3
24V		74	..	....	....
219	12	30	2	N2	N3
29 round barrel (For K & A Scopes)	11	22	2	N5	N5
29 round barrel (for C Scopes)	11	22	..	N5	N5
29, 25 octagon barrel	19	31	..	N5	N5
340, 342	....	....	1	N1	N4
SEARS 42, 43	12	21	2	N2	N3
50, 51	45	46	5	....	....
51L	55	46	1	N1	N4
53	47	46	1	N1	N4
54	....	....	3	....	....
SCHULTZ & LARSEN	54	46	1	N1	N4
SPRINGFIELD '03*	54	55	1	N1	N4
'03-A3*	59	45	..	....	....
STEVENS 26	22	22	2	N2	N3
27 octagon (attach N5 Mount to side of barrel)	31	31	..	....	N5
53 (For K and A Scopes)	16	21	2	N2	N3
53 (for C Scopes)	....	....	2	N2	N3
56, 66	12	13	2	N2	N3
57, 76, 762	12	12	2	N2	N3
416	18	17	2	N2	N3
417	15	15	2	N2	N3
417½	12	12	2	N2	N3
418, 418½	16	16	2	N2	N3
325, 322	....	....	1	N1	N4
STEVENS-SPRINGFIELD 15	16	13	2	N2	N3
83 (for K and A Scopes)	16	21	2	N2	N3
83 (for C Scopes)	....	....	2	N2	N3
84, 86	12	13	2	N2	N3
85, 87, 872	12	12	2	N2	N3
840	....	....	1	N1	N4
U.S. CARBINE, Cal. .30 M1	....	....	M	....	....
WEATHERBY MARK V	36	20A	..	....	....
Other models with FN Mauser Actions	45	46	5	....	....
WINCHESTER 54*, early Model 70	48	46	1	N1	N4
70 postwar models as follows:					
300 H&H, 375 H&H Magnum Calibers prior to 1964; 49 or	49A	46	1	N1	N4
375 H&H Magnum 1964 model	49A	46	1	N1	N4
300 Winchester Magnum, All other calibers	47	46	1	N1	N4
670	47	46	1	N1	N4
07, 05, 10	20A	17	..	N5	N5
88, 100, use one-piece base		53	..	....	....
53, 55, 64, 65, 71, 86, 92, 94, 95 and older lever action	....	....	3	....	....
43	18	18	..	....	....
03, 63 (for K and A Scopes)	19	22	2	N2	N3
03, 63 (for C Scopes)	19	22	..	N5	....
06, 62, 62A	32	32	..	....	....
90 octagon barrel (attach N5 Mount to right side of barrel)	32	32	..	....	N5
61 round barrel (for K and A Scopes)	19	13	2	N5	N5
61 round barrel (for C Scopes)	19	13	..	N5	N5
61 octagon barrel	25	32	..	N5	N5
60*, 67*, 68*	21	21	..	N2	N3
57, 69	12	13	2	N2	N3
69A, 72, 47	12	17	2	N2	N3
74	12	12	2	N2	N3
77	15	32	2	....	....
75 Sporter	15	30	2	N2	N3
75 Target	15	16	2	N2	N3
52*	25	57	2	....	N3
ZB .22	28	24	2	N2	N3
ZB Hornet, 218 Bee	39	24	..	....	....
SHOTGUNS					
Pump shotguns except Winchester 42	....	....	8	....	....
Winchester 42	....	....	2	....	....
Auto shotguns except Remington 11-48, 1100, Sportsman 48, 58, Winchester 50, Browning Double Auto	....	....	7	....	....
Remington Auto 11-48, 1100, Sportsman 48, 58, Winchester 50, Browning Double Auto with steel receiver	....	....	8	....	....

NOTE:

*Rifles so marked (and older guns in some other models) require bolt handle alteration, except with K and A scopes when the scope is mounted forward or N Mount is used in high position.

Top Mounts with No. 50 (long, one-piece) base can be used on do and single barrel shotguns with ribs of sufficient thickness for base scre

Attaching mounts on aluminum receivers is not recommended.

C4, C6, and V22 Scopes (like other makes designed for .22 rifles) have short eye relief, and for this reason should not be used on high power rifles.

© 1967 W. R. WEAVER COMPANY — PRINTED IN U.S.A.

FORM NO. 2010 — 1/67-1111

WEAVER ACCESSORIES 1967

MODEL		DESCRIPTION	HOWDEN #	RETAIL
K1	Scope	Crosshair	804-2566	$44.35
K1	Scope	Post	804-2574	44.35
K1	Scope	Shotgun Dot	804-2582	44.35
K2.5	Scope	Crosshair	804-2590	48.40
K2.5	Scope	Post	804-2608	48.40
K2.5	Scope	Dot	804-2616	58.30
K3	Scope	Crosshair	804-2624	48.40
K3	Scope	Post	804-2632	48.40
K3	Scope	Dot	804-2640	58.30
K4	Scope	Crosshair	804-2657	58.00
K4	Scope	Post	804-2665	58.00
K4	Scope	Dot	804-2673	67.90
K4	Scope	Range Finder	804-2681	64.30
K6	Scope	Crosshair	804-2699	62.50
K6	Scope	Post	804-2707	62.50
K6	Scope	Dot	804-2715	72.46
K6	Scope	Rangefinder	804-2723	68.80
K8	Scope	Crosshair	804-2731	76.95
K8	Scope	Dot	804-2749	86.85
K8	Scope	Rangefinder	804-2756	83.25
K10	Scope	Crosshair	804-2764	76.95
K10	Scope	Dot	804-2772	86.85
K10	Scope	Rangefinder	804-2780	83.25
K12	Scope	Crosshair	804-4174	93.00
K12	Scope	Dot	804-4182	102.90
K12	Scope	Rangefinder	804-4190	99.30
V4.5	Scope	Variable Crosshair	804-4216	71.00
V4.5	Scope	Variable Post	804-4224	71.00
V4.5	Scope	Variable Dot	804-4232	80.90
V7	Scope	Variable Crosshair	804-2330	82.50
V7	Scope	Variable Post	804-2348	82.50
V7	Scope	Variable Dot	804-2355	92.40
V9	Scope	Variable Crosshair	804-2363	91.75
V9	Scope	Variable Post	804-2371	91.75
V9	Scope	Variable Dot	804-2389	101.65
A2.8	Scope	Crosshair	804-2798	22.45
A2.8	Scope	Post	804-2806	22.45
A4	Scope	Crosshair	804-2814	24.70
A4	Scope	Post	804-2822	24.70

WEAVER ACCESSORIES 1967

MODEL		DESCRIPTION		HOWDEN #	RETAIL
V22	Scope	Variable	T.O.	804-2897	$21.25
V22	Scope	Variable	N3	804-2905	21.25
V22	Scope	Variable	N5	804-2913	21.25
C4	Scope	Tip-off		804-2921	13.60
C4	Scope	N-		804-2939	13.60
C4	Scope	N2		804-2947	13.60
C4	Scope	N3		804-2954	13.60
C4	Scope	N4		804-2962	13.60
C4	Scope	N5		804-2970	13.60
C6	Scope	Tip-off		804-2988	17.25
C6	Scope	N1		804-2996	17.25
C6	Scope	N2		804-3002	17.25
C6	Scope	N3		804-3010	17.25
C6	Scope	N4		804-3028	17.25
C6	Scope	N5		804-3036	17.25
PR	Top Detachable Rings	¾" std.		804-3051	13.10
PR	Top Detachable Rings	7/8" std.		804-3077	13.10
PR	Top Detachable Rings	1" std.		804-3044	13.10
PR	Top Detachable Rings	1" high		804-3085	13.10
PR	Top Detachable Rings	1.023" std.		804-3069	13.10
PR	Side Detachable Rings	¾" std.		804-3093	13.10
PR	Side Detachable Rings	1" std.		804-3101	13.10
PR	Side Detachable Rings	1.023 std.		804-3119	13.10
PR	Pivot Rings	¾" std.		804-3135	16.80
PR	Pivot Rings	1" std.		804-3127	16.80
PR	Pivot Rings	1" high		804-3150	16.80
PR	Pivot Rings	1.023" std.		804-3143	16.80
PR	Top Det. Extension Set	1" high		804-4240	16.15

MODEL	DESCRIPTION	HOWDEN #	RETAIL
	Tip-off Mount ¾"	804-3168	$ 3.00
	Tip-off Mount 7/8"	804-3176	4.50
	Tip-off Mount 1"	804-3184	11.80
N1	Side Mount ¾"	804-3192	3.00
N2	Side Mount ¾"	804-3200	3.00
N3	Side Mount ¾"	804-3218	3.00
N4	Side Mount ¾"	804-3226	3.00
N5	Side Mount ¾"	804-3234	3.00
T01	Adapter Base-Lee-Enfield	804-3242	2.70
T9	Adapter Base Ruger 10/22	804-4273	1.35
11	Top Base	804-3259	.70
12	Top Base	804-3267	.70
13	Top Base	804-3275	.70
14	Top Base	804-3283	.70
15	Top Base	804-3291	.70
16	Top Base	804-3309	.70
17	Top Base	804-3317	.70
18	Top Base	804-3325	.70
19	Top Base	804-3333	.70
20A	Top Base	804-3341	.70
21	Top Base	804-3358	.70
22	Top Base	804-3366	.70
24	Top Base	804-3374	.70
25	Top Base	804-3382	.70
27	Top Base	804-3390	.70
28	Top Base	804-3403	.70
29	Top Base	804-3416	.70
30	Top Base	804-3424	.70
31	Top Base	804-3432	.70
32	Top Base	804-3440	.70
35	Top Base	804-3457	.70
36	Top Base	804-3465	.70
39	Top Base	804-3473	.70
40A	Top Base	804-3481	.70
42	Top Base	804-3499	.70
43	Top Base	804-3507	.70

WEAVER ACCESSORIES 1967

MODEL	DESCRIPTION	HOWDEN #	RETAIL
44	Top Base	804-3515	$ .70
45	Top Base	804-3523	.70
46	Top Base	804-3531	.70
47	Top Base	804-3549	.70
48	Top Base	804-3556	.70
49A	Top Base	804-3564	.70
53	Top Base	804-3572	1.40
54	Top Base	804-3580	.70
55	Top Base	804-3598	.70
57	Top Base	804-3606	.70
58	Top Base	804-3614	1.40
59	Top Base	804-3622	.70
60	Top Base	804-3630	1.40
61	Top Base	804-3648	.70
62	Top Base	804-3655	1.40
63	Top Base	804-3663	1.40
64	Top Base	804-3671	.70
65	Top Base	804-3689	.70
66	Top Base	804-3697	.70
67	Top Base	804-3705	.70
68	Top Base	804-3713	.70
70	Top Base	804-3721	1.40
71	Top Base	804-3739	.70
72	Top Base	804-3747	.70
73	Top Base	804-3754	.70
74	Top Base	804-4265	1.40
75	Top Base	804-4299	.70
76	Top Base	804-4307	.70
1	Side Base	804-3762	1.40
2	Side Base	804-3770	1.40
3	Side Base	804-3788	1.40
4	Side Base	804-3796	1.40
5	Side Base	804-3804	1.40
M	Side Base	804-3812	1.40
7	Side Base	804-3820	1.40
8	Side Base	804-3838	1.40

MODEL	DESCRIPTION	HOWDEN #	RETAIL
114	Pivot Base	804-3846	$ .75
119	Pivot Base	804-3853	.75
120	Pivot Base	804-3861	.75
135	Pivot Base	804-3879	.75
136	Pivot Base	804-3887	.75
139	Pivot Base	804-3895	.75
140	Pivot Base	804-3903	.75
145	Pivot Base	804-3911	.75
146	Pivot Base	804-3929	.75
147	Pivot Base	804-3937	.75
148	Pivot Base	804-3945	.75
149	Pivot Base	804-3952	.75
153	Pivot Base	804-3960	1.50
154	Pivot Base	804-3978	.75
155	Pivot Base	804-3986	.75
159	Pivot Base	804-3994	.75
161	Pivot Base	804-4000	.75
162	Pivot Base	804-4018	1.50
163	Pivot Base	804-4026	1.50
168	Pivot Base	804-4034	.75
170	Pivot Base	804-4042	1.50
K1	Lens Caps	804-4059	3.00
K2.5 - K.3	Lens Caps	804-4067	3.00
K4-V7	Lens Caps	804-4075	3.00
K6-V9	Lens Caps	804-4083	3.00
K8-K10	Lens Caps	804-4091	3.00
A2.8	Lens Caps	804-4109	3.00
A4	Lens Caps	804-4117	3.00
V22	Lens Caps	804-4141	3.00
C4-C6	Lens Caps	804-4158	3.00